

isc Silicon NPN Power Transistor

2N4911

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 60V(\text{Min})$
- Low Collector Saturation Voltage-
: $V_{CE(sat)} = 0.6V(\text{Max.}) @ I_C = 1A$
- Wide Area of Safe Operation

APPLICATIONS



- Designed for driver circuits, switching and amplifier applications.

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)

| SYMBOL | PARAMETER | VALUE | UNIT |
|-----------|---|---------|------------------|
| V_{CBO} | Collector-Base Voltage | 60 | V |
| V_{CEO} | Collector-Emitter Voltage | 60 | V |
| V_{EBO} | Emitter-Base Voltage | 5 | V |
| I_C | Collector Current-Continuous | 1 | A |
| I_{CM} | Collector Current-Peak | 4 | A |
| I_B | Base Current-Continuous | 1 | A |
| P_C | Collector Power Dissipation @ $T_C = 25^\circ\text{C}$ | 25 | W |
| T_J | Junction Temperature | 200 | $^\circ\text{C}$ |
| T_{stg} | Storage Temperature Range | -65~200 | $^\circ\text{C}$ |

THERMAL CHARACTERISTICS

| SYMBOL | PARAMETER | MAX | UNIT |
|---------------|--------------------------------------|-----|--------------------|
| $R_{th\ j-c}$ | Thermal Resistance, Junction to Case | 7.0 | $^\circ\text{C/W}$ |

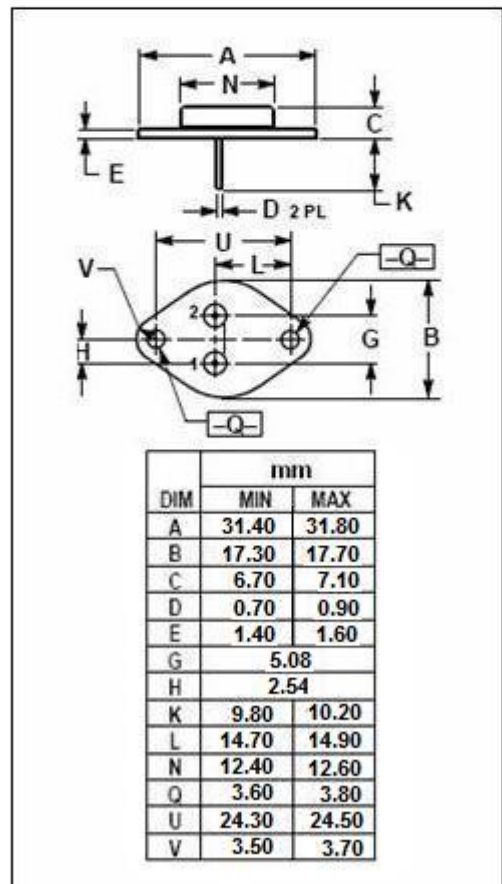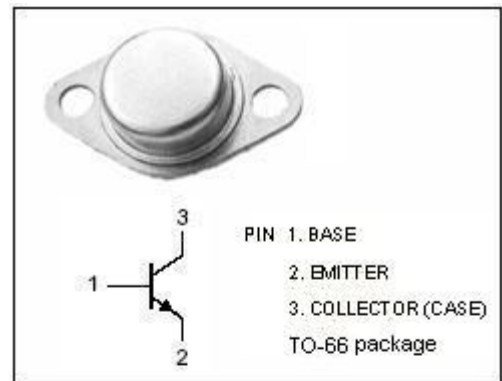

isc Silicon NPN Power Transistor

2N4911

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP. | MAX | UNIT |
|----------------|--------------------------------------|---|-----|------|------------|------|
| $V_{CEO(SUS)}$ | Collector-Emitter Sustaining Voltage | $I_C=100\text{mA}; I_B=0$ | 60 | | | V |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage | $I_C=1\text{A}; I_B=0.1\text{A}$ | | | 0.6 | V |
| $V_{BE(sat)}$ | Base-Emitter Saturation Voltage | $I_C=1\text{A}; I_B=0.1\text{A}$ | | | 1.3 | V |
| $V_{BE(on)}$ | Base-Emitter On Voltage | $I_C=1\text{A}; V_{CE}=1\text{V}$ | | | 1.3 | V |
| I_{CEX} | Collector Cutoff Current | $V_{CE}=60\text{V}; V_{BE(off)}=1.5\text{V}$ $V_{CE}=60\text{V}; V_{BE(off)}=1.5\text{V}; T_C=150^{\circ}\text{C}$ | | | 0.1 1.0 | mA |
| I_{CEO} | Collector Cutoff Current | $V_{CE}=30\text{V}; I_B=0$ | | | 0.5 | mA |
| I_{CBO} | Collector Cutoff Current | $V_{CB}=60\text{V}; I_E=0$ | | | 0.1 | mA |
| I_{EBO} | Emitter Cutoff Current | $V_{EB}=5\text{V}; I_C=0$ | | | 1.0 | mA |
| h_{FE-1} | DC Current Gain | $I_C=50\text{mA}; V_{CE}=1\text{V}$ | 40 | | | |
| h_{FE-2} | DC Current Gain | $I_C=500\text{mA}; V_{CE}=1\text{V}$ | 20 | | 100 | |
| h_{FE-3} | DC Current Gain | $I_C=1\text{A}; V_{CE}=1\text{V}$ | 10 | | | |
| f_T | Current-Gain—Bandwidth Product | $I_C=0.25\text{A}; V_{CE}=10\text{V}; f_{test}=1\text{MHz}$ | 3 | | | MHz |
| C_{OB} | Output Capacitance | $I_E=0; V_{CB}=10\text{V}; f_{test}=100\text{kHz}$ | | | 100 | pF |